


.....

OPTRAL



BF - Buffer Tight Buffer Cable



Cable description


- 01. Tight Buffer Fibre (0,9 mm)
- 02. Secondary Tight Coating

Applications

Indoor
Pigtail and jumper connections
Based on DIN VDE 0888 Part 2

Opciones

Easy-Strip Buffer

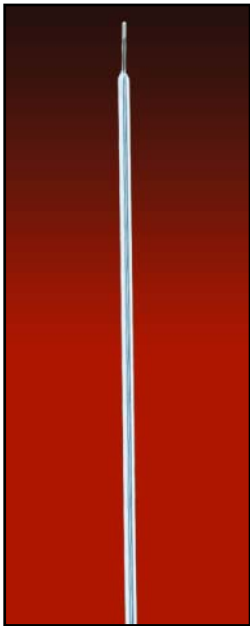

Advantages

Flexible / Resilient / Excellent mechanical resistance / Direct connectorization.



TOTALLY DIELECTRIC



MOISTURE PROTECTED



HIGH FLEXIBILITY



FLAME RETARDANT



LOW SMOKE EMISSION

Todas las especificaciones sujetas a cambio sin previo aviso. Consultar a OPTRAL las ediciones en vigor.

	SPECIFICATIONS
Fibres	1
Weight (Kg/Km)	0.75
Outer Ø (mm)	0.9 ± 0.05
Tensile Load (N)	5
Temperature Range	-5 °C to +60 °C
Min. Bending radius	20 x Outer Ø

.....